

A Review on Energy Efficient Routing Protocols In Wireless Sensor Networks

Srinivasan. R¹, E. Kannan ²,

*^{1, 2} Department of Computer Science and Engineering,
Vel Tech University, Chennai-62. Tamil Nadu, India.*

Abstract

Advancement in wireless sensor networks have rapidly changes day by day. Thus induced to implementing of new routing protocols specifically for sensor networks, major drawback of wireless sensors are energy and its life time. Routing protocols need to be efficient and thus happens when it needs low energy consumption. In these paper, we surveyed energy efficient routing protocols and their efficiency over energy aware had been compared and analyzed.

Introduction

Wireless sensor network (WSN) is widely considered as one of the most important technologies for the twenty-first century [1]. In the past decades, it has received tremendous attention from both academia and industry all over the world. A WSN typically consists of a large number of low-cost, low-power, and multifunctional wireless sensor nodes, with sensing, wireless communications and computation capabilities [2,3]. These sensor nodes communicate over short distance via a wireless medium and collaborate to accomplish a common task, for example, environment monitoring, military surveillance, and industrial process control [4]. The basic philosophy behind WSNs is that, while the capability of each individual sensor node is limited, the aggregate power of the entire network is sufficient for the required mission.

In many WSN applications, the deployment of sensor nodes is performed in an ad hoc fashion without careful planning and engineering. Once deployed, the sensor nodes must be able to autonomously organize themselves into a wireless communication network. Sensor nodes are battery-powered and are expected to operate without attendance for a relatively long period of time. In most cases it is very difficult and even impossible to change or recharge batteries for the sensor nodes. WSNs are characterized with denser levels of sensor node deployment, higher unreliability of sensor nodes, and sever power, computation, and memory constraints.

Thus, the unique characteristics and constraints present many new challenges for the development and application of WSNs.

A large number of research activities have been carried out to explore and overcome the constraints of WSNs and solve design and application issues. In this paper various routing protocols for wireless sensor network are discussed and compared. Section 2 of the paper discusses the network characteristics and design objectives. In Sections 3, the network design challenges and routing issues are described. In Section 4, various routing protocols are discussed and compared. Finally, Section 5 concludes the survey.

Literature Survey

Routing in wireless sensor networks differs from conventional routing in fixed networks in various ways. There is no infrastructure, wireless links are unreliable, sensor nodes may fail, and routing protocols have to meet strict energy saving requirements [5]. Many routing algorithms were developed for wireless networks in general. All major routing protocols proposed for WSNs may be divided into seven categories as shown in Table 1. We review sample routing protocols in each of the categories in preceding sub-sections.

Table 1: Routing Protocols for WSNs

Category	Representative Protocols
Location-based Protocols	MECN, SMECN, GAF, GEAR, Span, TBF, BVGF, GeRaF
Data-centric Protocols	SPIN, Directed Diffusion, Rumor Routing, COUGAR, ACQUIRE, EAD, Information-Directed Routing, Gradient-Based Routing, Energy-aware Routing, Information-Directed Routing, Quorum-Based Information Dissemination, Home Agent Based Information Dissemination
Hierarchical Protocols	LEACH, PEGASIS, HEED, TEEN, APTEEN
Mobility-based Protocols	SEAD, TTDD, Joint Mobility and Routing, Data MULES, Dynamic Proxy Tree-Base Data Dissemination
Multipath-based Protocols	Sensor-Disjoint Multipath, Braided Multipath, N-to-1 Multipath Discovery
Heterogeneity-based Protocols	IDSQ, CADR, CHR
QoS-based protocols	SAR, SPEED, Energy-aware routing

Location-Based Protocols

In location-based protocols, sensor nodes are addressed by means of their locations. Location information for sensor nodes is required for sensor networks by most of the routing protocols to calculate the distance between two particular nodes so that energy

consumption can be estimated. In this section, we present a sample of location-aware routing protocols proposed for WSNs.

Geographic Adaptive Fidelity (GAF): GAF [15] is an energy-aware routing protocol primarily proposed for MANETs, but can also be used for WSNs because it favors energy conservation. The design of GAF is motivated based on an energy model [16, 17] that considers energy consumption due to the reception and transmission of packets as well as idle (or listening) time when the radio of a sensor is on to detect the presence of incoming packets. GAF is based on mechanism of turning off unnecessary sensors while keeping a constant level of *routing fidelity* (or uninterrupted connectivity between communicating sensors). In GAF, sensor field is divided into grid squares and every sensor uses its location information, which can be provided by GPS or other location systems [16, 18, 19], to associate itself with a particular grid in which it resides. This kind of association is exploited by GAF to identify the sensors that are equivalent from the perspective of packet forwarding.

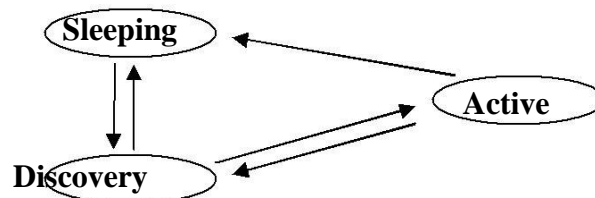


Figure 1: State Transition Diagram of GAF

As shown in Figure 1, the state transition diagram of GAF has three states, namely, *discovery*, *active*, and *sleeping*. When a sensor enters the *sleeping* state, it turns off its radio for energy savings. In the *discovery* state, a sensor exchanges discovery messages to learn about other sensors in the same grid. Even in the *active* state, a sensor periodically broadcasts its discovery message to inform equivalent sensors about its state. The time spent in each of these states can be tuned by the application depending on several factors, such as its needs and sensor mobility. GAF aims to maximize the network lifetime by reaching a state where each grid has only one active sensor based on sensor ranking rules. The ranking of sensors is based on their residual energy levels. Thus, a sensor with a higher rank will be able to handle routing within their corresponding grids. For example, a sensor in the *active* state has a higher rank than a sensor in the *discovery* state. A sensor with longer expected lifetime has a higher rank.

Geographic and Energy-Aware Routing (GEAR): GEAR [20] is an energy-efficient routing protocol proposed for routing queries to target regions in a sensor field. In GEAR, the sensors are supposed to have localization hardware equipped, for example, a GPS unit or a localization system [14] so that they know their current positions. Furthermore, the sensors are aware of their residual energy as well as the locations and residual energy of each of their neighbors. GEAR uses energy aware heuristics that are based on geographical information to select sensors to route a packet toward its destination region. Then, GEAR uses a recursive geographic forwarding algorithm to disseminate the packet inside the target region.

Coordination of Power Saving with Routing: Span [21,22] is a routing protocol also primarily proposed for MANETs, but can be applied to WSNs as its goal is to reduce energy consumption of the nodes. Span is motivated by the fact that the wireless network interface of a device is often the single largest consumer of power. Hence, it would be better to turn the radio off during idle time. Although Span does not require that sensors know their location information, it runs well with a geographic forwarding protocol. Span helps sensors to join a forwarding backbone topology as coordinators that will forward packets on behalf of other sensors between any source and destination. When used with a geographic forwarding protocol, Span's election rule requires each sensor to advertise its status (i.e., coordinator or non-coordinator), its neighbors, and its coordinators. Furthermore, when it receives a packet, a coordinator forwards the packet to a neighboring coordinator if any, which is the closest to the destination or to a non-coordinator that is closer to the destination.

Trajectory-Based Forwarding (TBF): TBF [23] is a routing protocol that requires a sufficiently dense network and the presence of a coordinate system, for example, a GPS, so that the sensors can position themselves and estimate distance to their neighbors. The source specifies the trajectory in a packet, but does not explicitly indicate the path on a hop-by-hop basis. Based on the location information of its neighbors, a forwarding sensor makes a greedy decision to determine the next hop that is the closest to the trajectory fixed by the source sensor. Route maintenance in TBF is unaffected by sensor mobility given that a source route is a trajectory that does not include the names of the forwarding sensors. In order to increase the reliability and capacity of the network, it is also possible to implement multipath routing in TBF where an alternate path is just another trajectory. TBF can be used for implementing networking functions, for example, flooding, discovery, and network management. TBF can also be used for resource discovery. Another interesting application of TBF is securing the perimeter of the network.

Geographic Random Forwarding (GeRaF): GeRaF was proposed by Zorzi and Rao [25], which uses geographic routing where a sensor acting as relay is not known *a priori* by a sender. There is no guarantee that a sender will always be able to forward the message toward its ultimate destination, that is, the sink. This is the reason that GeRaF is said to be *best-effort* forwarding. GeRaF assumes that all sensors are aware of their physical locations, as well as that of the sink. Although GeRaF integrates a geographical routing algorithm and an awake-sleep scheduling algorithm, the sensors are not required to keep track of the locations of their neighbors and their awake-sleep schedules. When a source sensor has sensed data to send to the sink, it first checks whether the channel is free in order to avoid collisions. If the channel remains idle for some period of time, the source sensor broadcasts a request-to-send (RTS) message to all of its active (or listening) neighbors. This message includes the location of the source and that of the sink. Note that the coverage area facing the sink, called *forwarding area*, is split into a set of N_p regions of different priorities such that all points in a region with a higher priority are closer to the sink than any point in a region with a lower priority. When active neighboring sensors receive the RTS message, they assess their priorities based on their locations and that of the sink. The source sensor waits for a CTS message from one of the sensors located in the highest

priority region. For GeRaF, the best relay sensor is the one closest to the sink, thus making the largest advancement of the data packet toward the sink. In case that the source does not receive the CTS message, it implies that the highest priority region is empty. Hence, it sends out another RTS polling sensors in the second highest priority region. This process continues till the source receives the CTS message, which means that a relay sensor has been found. Then, the source sends its data packet to the selected relay sensor, which in turn replies back with an ACK message. The relay sensor will act in the same way as the source sensor in order to find the second relay sensor. The same procedure repeats until the sink receives the sensed data packet originated from the source sensor. It may happen that the sending sensor does not receive any CTS message after sending N_p RTS messages. This means that the neighbors of the sending sensor are not active. In this case, the sending sensor backs off for some time and retries later. After a certain number of attempts, the sending sensor either finds a relay sensor or discards the data packet if the maximum allowed number of attempts is reached.

Data Centric Protocols

Data-centric protocols differ from traditional address-centric protocols in the manner that the data is sent from source sensors to the sink. In *address-centric* protocols, each source sensor that has the appropriate data responds by sending its data to the sink independently of all other sensors. However, in *data-centric* protocols, when the source sensors send their data to the sink, intermediate sensors can perform some form of aggregation on the data originating from multiple source sensors and send the aggregated data toward the sink. This process can result in energy savings because of less transmission required to send the data from the sources to the sink. In this section, we review some of the data-centric routing protocols for WSNs.

Directed Diffusion: Directed diffusion [30,31] is a data-centric routing protocol for sensor query dissemination and processing. It meets the main requirements of WSNs such as energy efficiency, scalability, and robustness. Directed diffusion has several key elements namely *data naming*, *interests and gradients*, *data propagation*, and *reinforcement*. A sensing task can be described by a list of attribute-value pairs. At the beginning of the directed diffusion process, the sink specifies a low data rate for incoming events. After that, the sink can *reinforce* one particular sensor to send events with a higher data rate by resending the original interest message with a smaller interval. Likewise, if a neighboring sensor receives this interest message and finds that the sender's interest has a higher data rate than before, and this data rate is higher than that of any existing gradient, it will *reinforce* one or more of its neighbors.

Rumor Routing: Rumor routing is a logical compromise between query flooding and event flooding app schemes [32]. Rumor routing is an efficient protocol if the number of queries is between the two intersection points of the curve of rumor routing with those of query flooding and event flooding. Rumor routing is based on the concept of *agent*, which is a long-lived packet that traverses a network and informs each sensor it encounters about the events that it has learned during its network traverse. An agent will travel the network for a certain number of hops and then die. Each sensor, including the agent, maintains an event list that has event-distance pairs,

where every entry in the list contains the event and the actual distance in the number of hops to that event from the currently visited sensor. Therefore, when the agent encounters a sensor on its path, it synchronizes its event list with that of the sensor it has encountered. Also, the sensors that hear the agent update their event lists according to that of the agent in order to maintain the shortest paths to the events that occur in the network.

Active Query Forwarding in Sensor Networks (ACQUIRE): ACQUIRE [34] is another data-centric querying mechanism used for querying named data.. It provides superior query optimization to answer specific types of queries, called *one-shot complex queries for replicated data*. ACQUIRE query (i.e., interest for named data) consists of several sub queries for which several simple responses are provided by several relevant sensors. Each sub-query is answered based on the currently stored data at its relevant sensor. ACQUIRE allows a sensor to inject an active query in a network following either a random or a specified trajectory until the query gets answered by some sensors on the path using a localized update mechanism. Unlike other query techniques, ACQUIRE allows the querier to inject a complex query into the network to be forwarded stepwise through a sequence of sensors.

Energy-Aware Data-Centric Routing (EAD): EAD is a novel distributed routing protocol, which builds a virtual backbone composed of active sensors that are responsible for in-network data processing and traffic relaying [35]. In this protocol, a network is represented by a broadcast tree spanning all sensors in the network and rooted at the gateway, in which all leaf nodes' radios are turned off while all other nodes correspond to active sensors forming the backbone and thus their radios are turned on. Specifically, EAD attempts to construct a broadcast tree that approximates an optimal spanning tree with a minimum number of leaves, thus reducing the size of the backbone formed by active sensors. EAD approach is energy aware and helps extend the network lifetime. The gateway plays the role of a data sink or event sink, whereas each sensor acts as a data source or event source.

Hierarchical Protocols

Many research projects in the last few years have explored hierarchical clustering in WSN from different perspectives [2]. Clustering is an energy-efficient communication protocol that can be used by the sensors to report their sensed data to the sink. In this section, we describe a sample of layered protocols in which a network is composed of several *clumps* (or *clusters*) of sensors. Each clump is managed by a special node, called *cluster head*, which is responsible for coordinating the data transmission activities of all sensors in its clump.

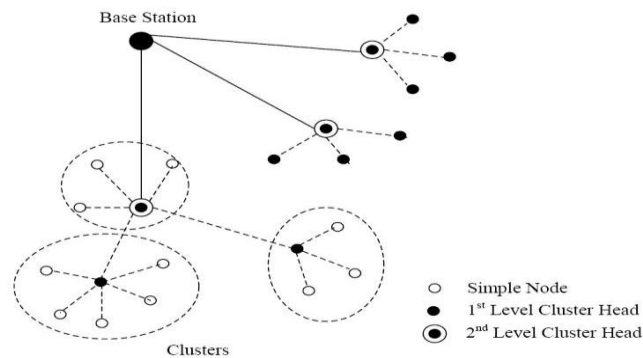


Figure 2: Cluster-based Hierarchical Model

As shown in Figure 2, a hierarchical approach breaks the network into clustered layers [55]. Nodes are grouped into clusters with a cluster head that has the responsibility of routing from the cluster to the other cluster heads or base stations. Data travel from a lower clustered layer to a higher one. Although, it hops from one node to another, but as it hops from one layer to another it covers larger distances. This moves the data faster to the base station. Clustering provides inherent optimization capabilities at the cluster heads. In this section, we review a sample of hierarchical-based routing protocols for WSNs.

Low-energy adaptive clustering hierarchy (LEACH): LEACH [36,37] is the first and most popular energy-efficient hierarchical clustering algorithm for WSNs that was proposed for reducing power consumption. In LEACH, the clustering task is rotated among the nodes, based on duration. Direct communication is used by each cluster head (CH) to forward the data to the base station (BS). It uses clusters to prolong the life of the wireless sensor network. LEACH is based on an *aggregation* (or *fusion*) technique that combines or aggregates the original data into a smaller size of data that carry only meaningful information to all individual sensors. LEACH divides the a network into several cluster of sensors, which are constructed by using localized coordination and control not only to reduce the amount of data that are transmitted to the sink, but also to make routing and data dissemination more scalable and robust. LEACH uses a randomize rotation of high-energy CH position rather than selecting in static manner, to give a chance to all sensors to act as CHs and avoid the battery depletion of an individual sensor and dieing quickly. The operation of LEACH is divided into rounds having two phases each namely (i) a setup phase to organize the network into clusters, CH advertisement, and transmission schedule creation and (ii) a steady-state phase for data aggregation, compression, and transmission to the sink.

Power-Efficient Gathering in Sensor Information Systems (PEGASIS): PEGASIS [39] is an extension of the LEACH protocol, which forms chains from sensor nodes so that each node transmits and receives from a neighbor and only one node is selected from that chain to transmit to the base station (sink). The data is gathered and moves from node to node, aggregated and eventually sent to the base station. The chain construction is performed in a greedy way. Unlike LEACH, PEGASIS avoids cluster formation and uses only one node in a chain to transmit to the BS (sink) instead of using multiple nodes. A sensor transmits to its local neighbors

in the data fusion phase instead of sending directly to its CH as in the case of LEACH. In PEGASIS routing protocol, the construction phase assumes that all the sensors have global knowledge about the network, particularly, the positions of the sensors, and use a greedy approach. When a sensor fails or dies due to low battery power, the chain is constructed using the same greedy approach by bypassing the failed sensor. In each round, a randomly chosen sensor node from the chain will transmit the aggregated data to the BS, thus reducing the per round energy expenditure compared to LEACH.

Simulation results showed that PEGASIS is able to increase the lifetime of the network twice as much the lifetime of the network under the LEACH protocol. Such performance gain is achieved through the elimination of the overhead caused by dynamic cluster formation in LEACH and through decreasing the number of transmissions and reception by using data aggregation. Although the clustering overhead is avoided, PEGASIS still requires dynamic topology adjustment since a sensor node needs to know about energy status of its neighbors in order to know where to route its data. Such topology adjustment can introduce significant overhead especially for highly utilized networks.

Hybrid, Energy-Efficient Distributed Clustering (HEED): HEED [40,41] extends the basic scheme of LEACH by using residual energy and node degree or density as a metric for cluster selection to achieve power balancing. It operates in multi-hop networks, using an adaptive transmission power in the inter-clustering communication. HEED was proposed with four primary goals namely (i) prolonging network lifetime by distributing energy consumption, (ii) terminating the clustering process within a constant number of iterations, (iii) minimizing control overhead, and (iv) producing well-distributed CHs and compact clusters. In HEED, the proposed algorithm periodically selects CHs according to a combination of two clustering parameters. The primary parameter is their residual energy of each sensor node (used in calculating probability of becoming a CH) and the secondary parameter is the intra-cluster communication cost as a function of cluster density or node degree (i.e. number of neighbors). The primary parameter is used to probabilistically select an initial set of CHs while the secondary parameter is used for breaking ties. The HEED clustering improves network lifetime over LEACH clustering because LEACH randomly selects CHs (and hence cluster size), which may result in faster death of some nodes. The final CHs selected in HEED are well distributed across the network and the communication cost is minimized. However, the cluster selection deals with only a subset of parameters, which can possibly impose constraints on the system. These methods are suitable for prolonging the network lifetime rather than for the entire needs of WSN.

Adaptive Periodic Threshold Sensitive Energy Efficient Sensor Network Protocol (APTEEN): APTEEN [44] is an improvement to TEEN to overcome its shortcomings and aims at both capturing periodic data collections (LEACH) and reacting to time-critical events (TEEN). Thus, APTEEN is a hybrid clustering-based routing protocol that allows the sensor to send their sensed data periodically and react to any sudden change in the value of the sensed attribute by reporting the corresponding values to their CHs. The architecture of APTEEN is same as in TEEN, which uses the concept

hierarchical clustering for energy efficient communication between source sensors and the sink. APTEEN supports three different query types namely (i) historical query, to analyze past data values, (ii) one-time query, to take a snapshot view of the network; and (iii) persistent queries, to monitor an event for a period of time. APTEEN guarantees lower energy dissipation and a larger number of sensors alive [44].

Energy Efficient Homogenous Clustering Algorithm for Wireless Sensor Networks: Singh et al. [3] proposed homogeneous clustering algorithm for wireless sensor network that saves power and prolongs network life. The life span of the network is increased by ensuring a homogeneous distribution of nodes in the clusters. A new cluster head is selected on the basis of the residual energy of existing cluster heads, holdback value, and nearest hop distance of the node. The homogeneous algorithm makes sure that every node is either a cluster head or a member of one of the clusters in the wireless sensor network. In the proposed clustering algorithm the cluster members are uniformly distributed, and thus, the life of the network is more extended. Further, in the proposed protocol, only cluster heads broadcast cluster formation message and not the every node. Hence, it prolongs the life of the sensor networks. The emphasis of this approach is to increase the life span of the network by ensuring a homogeneous distribution of nodes in the clusters so that there is not too much receiving and transmitting overhead on a Cluster Head.

Mobility-Based Protocols

Mobility brings new challenges to routing protocols in WSNs. Sink mobility requires energy-efficient protocols to guarantee data delivery originated from source sensors toward mobile sinks. In this section we discuss sample mobility-based routing protocols for mobile WSNs.

Joint Mobility and Routing Protocol: A network with a static sink suffers from a severe problem, called *energy sink-hole problem*, where the sensors located around the static sink are heavily used for forwarding data to the sink on behalf of other sensors. As a result, those heavily loaded sensors close to the sink deplete their battery power more quickly, thus disconnecting the network. This problem exists even when the static sink is located at its optimum position corresponding to the center of the sensor field [45]. To address this problem, a mobile sink for gathering sensed data from source sensors was suggested [45]. In this case, the sensors surrounding the sink change over time, giving the chance to all sensors in the network to act as data relays to the mobile sink and thus balancing the load of data routing on all the sensors. Under the shortest-path routing strategy, the average load of data routing is reduced when the trajectories of the sink mobility correspond to concentric circles (assuming that the sensor field is a circle). Another category of mobility trajectories is to move the sink in annuli. However, such movement can be viewed as a weighted average over the movements on a set of concentric circles. In particular, the optimum mobility strategy of the sink is a symmetric strategy in which the trajectory of the sink is the periphery of the network. The trajectory with a radius equal to the radius of the sensor field maximizes the distance from the sink to the centre of the network that represents the hot spot.

Data MULES Based Protocol: Data MULE based was proposed to address the need of guaranteeing cost-effective connectivity in a sparse network while reducing the energy consumption of the sensors [46]. It is a three-tier architecture based on mobile entities, called mobile ubiquitous LAN extensions (MULE). The MULEs architecture has three main layers. The bottom layer contains static wireless sensors that are responsible for sensing an environment. The top layer includes WAN connected devices and access points/central repositories for analyzing the sensed data. These access points communicate with a central data warehouse enabling them to synchronize the collected data, identify redundant data, and acknowledge the receipt of the data sent by the MULEs for reliable data transmission. The middle layer has mobile entities (MULEs) that move in the sensor field and collect sensed data from the source sensors when in proximity deliver them to those access points when in close range. The MULE architecture helps the sensors save their energy as much as possible and thus extend their lifetime. Since the sensors directly communicate with the MULEs through short-range paths, they deplete their energy slowly and uniformly. In addition, the MULE architecture has low infrastructure cost. Because of the direct communication between the source sensors and the MULES, there is no routing overhead that would drain the energy of the sensors. MULE architecture is fault tolerant and very robustness and scalable. However, if a MULE fails, it will degrade the performance of a sparse network for decreasing its data success rate and increasing its latency. For time-critical applications, the MULE architecture may introduce an undesirable delay in reporting the sensed data of the source sensors and thus may not be practical. One way to solve this problem is to equip the MULEs with an always-on connection so that they act as mobile sinks (i.e., MULEs and access points).

Scalable Energy-Efficient Asynchronous Dissemination (SEAD): SEAD [47] is self-organizing protocol, which was proposed to trade-off between minimizing the forwarding delay to a mobile sink and energy savings. SEAD considers data dissemination in which a source sensor reports its sensed data to multiple mobile sinks and consists of three main components namely dissemination tree (*d-tree*) construction, data dissemination, and maintaining linkages to mobile sinks. It assumes that the sensors are aware of their own geographic locations. Every source sensor builds its data dissemination tree rooted at itself and all the dissemination trees for all the source sensors are constructed separately. SEAD can be viewed as an overlay network that sits on top of a location-aware routing protocol, for example, geographical forwarding.

Dynamic Proxy Tree-Based Data Dissemination: A dynamic proxy tree-based data dissemination framework [48] was proposed for maintaining a tree connecting a source sensor to multiple sinks that are interested in the source. This helps the source disseminate its data directly to those mobile sinks. In this framework, a network is composed of stationary sensors and several mobile hosts, called *sinks*. The sensors are used to detect and continuously monitor some mobile targets, while the mobile sinks are used to collect data from specific sensors, called *sources*, which may detect the target and periodically generate detected data or aggregate detected data from a subset of sensors. Because of target mobility, a source may change and a new sensor closer

to the target may become a source. Each source is represented by a *stationary source proxy* and each sink is represented by a *stationary sink proxy*. The source and sink proxies are temporary in the sense that they change as the source sensors change and the sinks move. A source will have a new source proxy only when the distance between the source and its current proxy exceeds a certain threshold. Likewise, a sink will have a new sink proxy only when the distance between the sink and its current proxy exceeds a certain threshold. The design of such proxies reduces the cost of pushing data to and querying data from the source and sinks proxies.

Multipath-Based Protocols

Considering data transmission between source sensors and the sink, there are two routing paradigms: *single-path* routing and *multipath* routing. In single-path routing, each source sensor sends its data to the sink via the shortest path. In multipath routing, each source sensor finds the first k shortest paths to the sink and divides its load evenly among these paths. In this section, we review a sample of multipath routing protocols for WSNs.

Disjoint Paths: Sensor-disjoint multipath routing [49,50] is a multipath protocol that helps find a small number of alternate paths that have no sensor in common with each other and with the primary path. In sensor-disjoint path routing, the primary path is best available whereas the alternate paths are less desirable as they have longer latency. The disjoint makes those alternate paths independent of the primary path. Thus, if a failure occurs on the primary path, it remains local and does not affect any of those alternate paths. The sink can determine which of its neighbors can provide it with the highest quality data characterized by the lowest loss or lowest delay after the network has been flooded with some low-rate samples. Although disjoint paths are more resilient to sensor failures, they can be potentially longer than the primary path and thus less energy efficient.

Braided Paths: Braided multipath [49,50] is a partially disjoint path from primary one after relaxing the disjointedness constraint. To construct the braided multipath, first primary path is computed. Then, for each node (or sensor) on the primary path, the best path from a source sensor to the sink that does not include that node is computed. Those best alternate paths are not necessarily disjoint from the primary path and are called *idealized* braided multipaths. Moreover, the links of each of the alternate paths lie either on or geographically close to the primary path. Therefore, the energy consumption on the primary and alternate paths seems to be comparable as opposed to the scenario of mutually ternate and primary paths. The braided multipath can also be constructed in a localized manner in which case the sink sends out a primary-path reinforcement to its first preferred neighbor and alternate-path reinforcement to its second preferred neighbor.

N-to-1 Multipath Discovery: N-to-1 multipath discovery [51] is based on the simple flooding originated from the sink and is composed of two phases, namely, *branch aware flooding* (or phase 1) and *multipath extension of flooding* (or phase 2). Both phases use the same routing messages whose format is given by $\{mtype, mid, nid, bid, cst, path\}$, where *mtype* refers to the type of a message. This multipath discovery protocol generates multiple node-disjoint paths for every sensor. In

multihop routing, an active per-hop packet salvaging strategy can be adopted to handle sensor failures and enhance network reliability.

Heterogeneity-Based Protocols

In heterogeneity sensor network architecture, there are two types of sensors namely line-powered sensors which have no energy constraint, and the battery-powered sensors having limited lifetime, and hence should use their available energy efficiently by minimizing their potential of data communication and computation. . In this section we discuss uses of heterogeneity in WSNs to extend network lifetime and present a few routing protocols.

Information-Driven Sensor Query (IDSQ): IDSQ [50,51] addresses the problem of heterogeneous WSNs of maximizing information gain and minimizing detection latency and energy consumption for target localization and tracking through dynamic sensor querying and data routing. To improve tracking accuracy and reduce detection latency, communication between sensors is necessary and consumes significant energy. In order to conserve power, only a subset of sensors need to be active when there are interesting events to report in some parts of the network. The choice of a subset of active sensors that have the most useful information is balanced by the communication cost needed between those sensors. Useful information can be sought based on predicting the space and time interesting events would take place. In IDSQ protocol, first step is to select a sensor as leader from the cluster of sensors. This leader will be responsible for selecting optimal sensors based on some information utility measure.

QoS-based Protocols

In addition to minimizing energy consumption, it is also important to consider quality of service (QoS) requirements in terms of delay, reliability, and fault tolerance in routing in WSNs. In this section, we review a sample QoS based routing protocols that help find a balance between energy consumption and QoS requirements.

Sequential Assignment Routing (SAR): SAR [53] is one of the first routing protocols for WSNs that introduces the notion of QoS in the routing decisions. It is a table-driven multi-path approach striving to achieve energy efficiency and fault tolerance. Routing decision in SAR is dependent on three factors: energy resources, QoS on each path, and the priority level of each packet [11, 13, 54]. The SAR protocol creates trees rooted at one-hop neighbors of the sink by taking QoS metric, energy resource on each path and priority level of each packet into consideration. By using created trees, multiple paths from sink to sensors are formed. One of these paths is selected according to the energy resources and QoS on the path. Failure recovery is done by enforcing routing table consistency between upstream and downstream nodes on each path. Any local failure causes an automatic path restoration procedure locally. The objective of SAR algorithm is to minimize the average weighted QoS metric throughout the lifetime of the network. If topology changes due to node failures, a path re-computation is needed. As a preventive measure, a periodic re-computation of paths is triggered by the base-station to account for any changes in the topology. A handshake procedure based on a local path restoration scheme between neighboring

nodes is used to recover from a failure. Failure recovery is done by enforcing routing table consistency between upstream and downstream nodes on each path. Simulation results showed that SAR offers less power consumption than the minimum-energy metric algorithm, which focuses only the energy consumption of each packet without considering its priority. Although, this ensures fault-tolerance and easy recovery, the protocol suffers from the overhead of maintaining the tables and states at each sensor node especially when the number of nodes is huge.

Energy-Aware QoS Routing Protocol: In this QoS aware protocol [57] for sensor networks, real-time traffic is generated by imaging sensors. The proposed protocol extends the routing approach in [62] and finds a least cost and energy efficient path that meets certain end-to-end delay during the connection. The link cost used is a function that captures the nodes' energy reserve, transmission energy, error rate and other communication parameters. In order to support both best effort and real-time traffic at the same time, a class-based queuing model is employed. The queuing model allows service sharing for real-time and non-real-time traffic. The protocol finds a list of least cost paths by using an extended version of Dijkstra's algorithm and picks a path from that list which meets the end-to-end delay requirement. Simulation results show that the proposed protocol consistently performs well with respect to QoS and energy metrics, however, it does not provide flexible adjusting of bandwidth sharing for different links.

Comparative Analysis:

S. No.	Paper Title	Method Used	Range
1	Comparison of Energy Harvesting Systems for Wireless Sensor Networks	Radio standard Typical range Data rate (kbps) Sleep mode (deep sleep) Processor only	10000 mm ³
2	Matrix Routing – An interference range insensitive routing protocol for Wireless Sensor Networks	Power distribution Fading effect	10000 mm ³
3	Radio Range Adjustment for Energy Efficient Wireless Sensor Networks	Radio Power Model and Characteristic Distance Topology Management	7000 mm ³
4	An Introduction to Wireless Sensor Networks	Constraint satisfaction/ optimization (centralized) Joint estimation-using ranging estimates (centralized) Multihop distance estimation (distributed) Iterative localization (distributed) Potential fields (distributed)	20000 mm ³
5	Routing Protocols in Wireless Sensor Networks	Multipath-based Protocols Heterogeneity-based Protocols QoS-based Protocols	2000 mm ³

Conclusion

One of the main challenges in the design of routing protocols for WSNs is energy efficiency due to the scarce energy resources of sensors. The ultimate objective behind the routing protocol design is to keep the sensors operating for as long as possible, thus extending the network lifetime. The energy consumption of the sensors is dominated by data transmission and reception. Therefore, routing protocols designed for WSNs should be as energy efficient as possible to prolong the lifetime of individual sensors, and hence the network lifetime. In this paper, we have surveyed a sample of routing protocols by taking into account several classification criteria, including location information, Energy, network architecture. Which clearly specifies the need of energy efficiency in routing protocol that is used for wireless sensor networks.

References

- [1] “21 ideas for the 21st century”, Business Week, Aug. 30 1999, pp. 78-167.
- [2] S.K. Singh, M.P. Singh, and D.K. Singh, “A survey of Energy-Efficient Hierarchical Cluster-based Routing in Wireless Sensor Networks”, *International Journal of Advanced Networking and Application (IJANA)*, Sept.–Oct. 2010, vol. 02, issue 02, pp. 570–580.
- [3] S.K. Singh, M.P. Singh, and D.K. Singh, "Energy-efficient Homogeneous Clustering Algorithm for Wireless Sensor Network", *International Journal of Wireless & Mobile Networks (IJWMN)*, Aug. 2010, vol. 2, no. 3, pp. 49-61.
- [4] Jun Zheng and Abbas Jamalipour, “Wireless Sensor Networks: A Networking Perspective”, a book published by A John & Sons, Inc, and IEEE, 2009.
- [5] S. Misra et al. (eds.), *Guide to Wireless Sensor Networks*, Computer Communications and Networks, DOI: 10.1007/978-1-84882-218-4 4, Springer-Verlag London Limited 2009.
- [6] Ivan Stojmenovic and Stephan Olariu. Data-centric protocols for wireless sensor networks. In *Handbook of Sensor Networks*, Chapter 13, pages 417–456. Wiley, 2005.
- [7] Christopher Ho, Katia Obraczka, Gene Tsudik, and Kumar Viswanath, “Flooding for reliable multicast in multi-hop ad hoc networks”, In *Proceedings of the 3rd International Workshop on Discrete Algorithms and Methods for Mobile Computing and Communications (DIAL-M’99)*, 1999, pp. 64–71.
- [8] Ming Liu, Jiannong Cao, Guihai Chen, and Xiaomin Wang, “An Energy-Aware Routing Protocol in Wireless Sensor Networks”, *Sensors* 2009, vol. 9, pp. 445-462.
- [9] Luis Javier García Villalba, Ana Lucila Sandoval Orozco, Alicia Triviño Cabrera, and Cláudia Jacy Barenco Abbas, “Routing Protocol in Wireless Sensor Networks”, *Sensors* 2009, vol. 9, pp. 8399-8421.

- [10] E. Zanj, M. Baldi, and F. Chiaraluce, "Efficiency of the Gossip Algorithm for Wireless Sensor Networks", In *Proceedings of the 15th International Conference on Software, Telecommunications and Computer Networks (SoftCOM)*, Split-Dubrovnik, Croatia, September, 2007.
- [11] I.F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, "A Survey on Sensor Network", *IEEE Communication Magazine*, vol. 40, no. 8, Aug. 2002, pp. 102-114.
- [12] Kemal Akkaya and Mohamed Younis, "A Survey on Routing Protocols for Wireless Sensor Networks", *Ad hoc Networks*, vol. 3, no. 3, May 2005, pp. 325-349.
- [13] N. Bulusu, J. Heidemann, and D. Estrin, "GPS-less Low Cost Outdoor Localization for Very Small Devices", *IEEE Personal Communication Magazine*, vol. 7, no. 5, Oct. 2000, pp. 28-34.
- [14] Y. X:u, J. Heidemann, and D. Estrin, "Geography-informed energy conservation for ad-hoc routing", *Proceedings ACM/IEEE MobiCom'01*, Rome, Italy, July 2001, pp. 70-84.
- [15] M. Stemm and R. H. Katz, "Measuring and reducing energy consumption of network rfaces in hand-held devices", *IEICE Transaction on Communications*, vol. E80-B, 8, Aug.1997, pp. 1125-1131.
- [16] O. Kasten, "Energy Consumption", www.infethz.ch/~kasten/research/bathtub/energy-consumption.html.
- [17] P. Bahl and V. N. Padmanabhan, "Radar: A in-building rf-based user location and tracking system", *Proceedings IEEE INFOCOM'00*, vol. 2, Tel-Aviv, Israel, Mar. 2000, pp. 775-784.
- [18] L. Doherty, K. S. Pister, and L. E. Ghaoui, "Convex position estimation in wireless sensor networks", *Proceedings IEEE INFOCOM'01*, vol. 3, Anchorage, AK, Apr. 2001, pp. 1655-1663.
- [19] Y. Yu, R. Govindan, and D. Estrin, "Geographical and energy aware routing: A recursive data dissemination protocol for wireless sensor networks", *Technical Report UCLA/CSD-TR-01-0023*, UCLA Computer Science Department, May 2001.

